

Compact Symbolic Execution

Marek Trtík

Faculty of Informatics, Masaryk University, Brno, Czech Republic
 trtik@fi.muni.cz

Abstract. We present a generalisation of King’s symbolic execution technique called compact symbolic execution. It is based on a concept of templates: a template is a declarative parametric description of such a program part, generating paths in symbolic execution tree with regularities in program states along them. Typical sources of these paths are program loops and recursive calls. Using the templates we fold the corresponding paths into single vertices and therefore considerably reduce size of the tree without loss of any information. There are even programs for which compact symbolic execution trees are finite even though the classic symbolic execution trees are infinite.

1 Introduction

Classic symbolic execution as proposed by King in 1976 [8] systematically explores all real paths in an analysed program. There is typically huge (or even infinite) number of real paths even for very small and simple programs. Therefore, exploration of the real paths becomes a serious problem. We speak about the *path explosion problem*.

Compact symbolic execution also explores all real program paths, but in a very compact manner. We analyse a given program *before* we start its symbolic execution. We look for those parts of the program, which might produce real paths with some regularities in program states along them. Typically, program loops and recursion produces these regularities. We analyse the program parts independently from the remainder of the program. If the analysis of a part succeeds, then a result is a *template*, i.e. a declarative parametric description of the complete behaviour of the analysed part. Therefore, an output from the program analysis is a set of templates. Now we can execute the program symbolically with the templates. Until we reach some of the successfully analysed program parts, we proceed just like in classic symbolic execution. Let us now suppose we have just reached such a part. Having a template for the part, we do not need to symbolically execute interior of the part. We just instantiate the template into the end of the current path and then we *jump* behind the part, where we continue with classic symbolic execution again.

The worst case for compact symbolic execution is, when we fail to compute any template for a given program. Compact symbolic execution then reduces to classic one, and we gain no space savings.

2 Overview

In this section we give an intuition of compact symbolic execution. For simplicity of presentation we use the following definition of a program. Although our programs are simple they support typical imperative constructs.

Definition 1 (Program) *A program is a collection of functions and global variables. Each function has its own local variables. All program variables and functions have different names. Exactly one function is marked as starting one. Each function is represented as an oriented graph. Vertices in the graph identify program locations, while edges define transitions between them. We distinguish a single entry and exit location in each graph. There is no in-edge to entry location and there is no out-edge from the exit one. We label edges by actions to be taken when moving between connected locations. An action can be*

- (1) *An assignment of the form $\langle \text{variable} \rangle := \langle \text{expression} \rangle$,*
- (2) *Call by value statements*
 - (a) $\langle \text{variable} \rangle := \langle \text{function-name} \rangle (\langle \text{arg-list} \rangle)$, or
 - (b) $\langle \text{function-name} \rangle (\langle \text{arg-list} \rangle)$
- (3) *A return value statement **ret** $\langle \text{expression} \rangle$,*
- (4) ***skip** statement, which does nothing, or*
- (5) *A boolean expression over program variables.*

*If an edge $e = (u, v)$ is labelled by one of the actions (1)-(4), then out-degree of u is 1. Otherwise, label of e is an action (5), out-degree of u is 2 and its out-edges are labelled by boolean expressions γ and $\neg\gamma$. No action (2) can reference the starting function. And for simplicity we do not consider pointer arithmetic nor heap allocations. We prevent invalid operations in actions (like division by zero, etc.) by branchings into error locations. An error location is any location with a single out-edge heading back to that location and it is labelled with **skip** action.*

We can see an example of a program at Figure 1 (a). The depicted function `linSrch` returns the least index i into the array A such that $A[i] == x$. If x is not in A at all, then it returns -1 .

We first briefly describe classic symbolic execution as proposed by King [8]. Instead of passing concrete data into parameters of the starting function, we pass symbols from a set $\{\alpha_0, \alpha_1, \dots\}$. Let us suppose we pass symbols α_0 and α_1 to variables a and b respectively. After executing an action $c := 2*a + b$ the variable c will contain a *symbolic expression* $2\alpha_0 + \alpha_1$ as its value. *Symbolic memory* is a function θ from program variables to a set of symbolic expressions. We further maintain a boolean symbolic expression φ called *path condition*. It represent a complete identifier of a particular program path taken during an execution. φ is initially *true* and it can be updated at program branchings. Let θ be a symbolic memory having $\theta(a) = \alpha_0$, $\theta(b) = \alpha_1$ and $\theta(c) = 2\alpha_0 + \alpha_1$ and let $c - a > 2*b$ and $c - a \leq 2*b$ be actions of out-edges of an branching location. For the first action we proceed as follows. We evaluate the action in θ . The result is a boolean symbolic expression $\alpha_0 + \alpha_1 > 2\alpha_1$. If $\varphi \rightarrow (\alpha_0 + \alpha_1 > 2\alpha_1)$ is satisfiable, we update

φ to $\varphi \wedge (\alpha_0 + \alpha_1 > 2\alpha_1)$ and we continue the execution by crossing the edge having the action. Then we proceed similarly for the second action. Note that if both implications are satisfiable, we fork the execution into two parallel and independent executions. Besides a symbolic memory and a path condition we commonly have a call stack Ξ and we also need to identify a current program location l . Putting all the things together we get a *program state* represented by a tuple $s = (\theta, \varphi, \Xi, l)$. Note that we understand a call stack record as pairs (σ, l) , where l is a return location and σ is a restriction of a symbolic memory to local variables. Further, we commonly describe the symbolic execution of a program by a tree structure called *symbolic execution tree*. Vertices of the tree are related to program locations visited during the execution and edges reflect transitions between the locations. Each vertex of the tree is labelled by a related program state. But instead of labels T and F for branching edges (as proposed by King), we label them by evaluated actions of the branching edges. Figure 1 (b) depicts a part of symbolic execution tree of the example program from Figure 1 (a) (with omitted program states labelling the vertices). Please ignore grey regions in the tree for now. We assume that classic symbolic execution of the program started with an initial symbolic memory $\theta = \{(\mathbf{i}, \alpha_0), (\mathbf{n}, \alpha_1), (\mathbf{x}, \alpha_2), (\mathbf{A}, \alpha_3)\}$.

We often use the following dot-notation to access elements of tuples. If $s = (\theta, \varphi, \Xi, l)$ is a program state, then $s.\theta$ denotes its symbolic memory, $s.\varphi$ denotes its path condition, $s.\Xi$ is its call stack and $s.l$ is a current program location. Further, if u is a vertex of symbolic execution tree, then $u.s$ denotes program state labelling the vertex. And instead of $u.s.\theta$, $u.s.\varphi$, $u.s.\Xi$ and $u.s.l$ we simply write $u.\theta$, $u.\varphi$, $u.\Xi$ and $u.l$. Finally, if Ξ is a call stack then we use dot-notation to access record at the top of the call stack. So, for example $\Xi.l$ denotes return location of record at the top of Ξ .

Symbols $\{\alpha_0, \alpha_1, \dots\}$ in classic symbolic execution represent input values to whole program. We generalise this concept to allow independent symbolic execution of *parts* of an analysed program independently to the remainder. Each such a part uses the symbols $\{\alpha_0, \alpha_1, \dots\}$ relative to a chosen entry location to the part. Then using a *composition* of program states (defined later) we can express any run of classic symbolic execution as a composition of program states resulting from analyses of the parts. Let $s = (\theta, \varphi, \Xi, l)$ be a program state resulting from a symbolic execution from a program location l_0 (e.g. the entry location of the starting function), up to an entry location l of an independently analysed program part. Let $s' = (\theta', \varphi', \Xi', l')$ be a program state resulting from the analysis of the part, i.e. s' represents a symbolic execution from the entry location l to some exit location l' from the part. Then $s \circ s' = (\theta \circ \theta', \varphi \wedge \theta\langle\varphi'\rangle, \Xi \circ (\theta \circ \Xi'), l')$ is composed program state representing symbolic execution from l_0 to l' through the analysed part (entered in location l). We can see that composition of program states is implemented as composition of their individual components. We discuss very details of these operations in Section 3. Only note that composed path condition is $\varphi \wedge \theta\langle\varphi'\rangle$ rather than $\varphi \wedge \varphi'$. This is because φ' may contain some symbols. But they are related to the entry location l of the analysed part and not to the location l_0 . Therefore, we have to compose φ'

with θ first to express φ' in terms of symbols relative to location l_0 . We do the similar effect of shifting symbols from location l to l_0 in the compositions $\theta \circ \theta'$ and $\theta \circ \Xi'$.

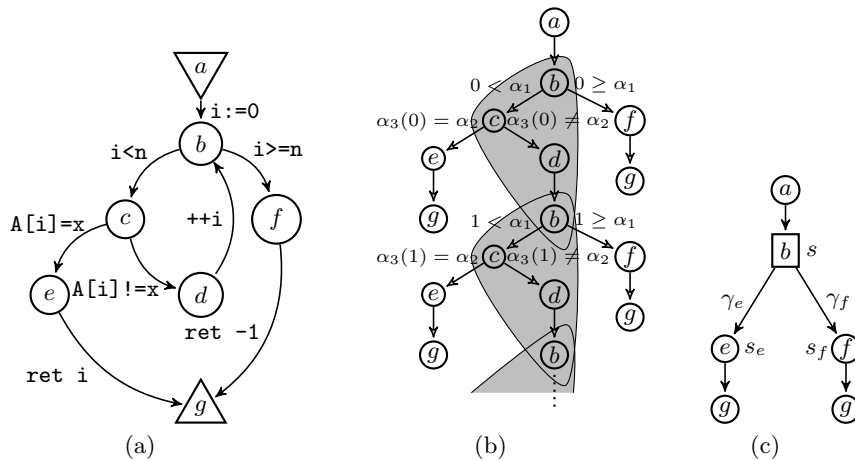


Fig. 1. (a) A program with a function `linSrch(A,n,x)`. (b) Symbolic execution tree of function `linSrch`. (c) Compact symbolic execution tree of function `linSrch`.

In the symbolic execution tree at Figure 1 (b) there is a single path highlighted by a sequence of grey regions. Vertices in each region are related to the same sequence of program locations: b, c, d, b . Moreover, we enter the path at vertex referencing location b and we can leave the path either by stepping into a vertex referencing location e or into a vertex referencing location f . Let us denote the entry vertex into the path as b_0 and the exit vertices from the path referencing locations e and f as $e_0, e_1, \dots$ and $f_0, f_1, \dots$ respectively being indexed from the top down. Our goal is to completely eliminate the path in grey from the tree, while still representing all real program paths. One way to do so is to represent whole the path by a single vertex, b say, with two direct successors. The first successor, e say, represents all the exit vertices e_i from the path and the second, f say, representing all the exits f_i . Note that names of the vertices b , e and f also represent program locations they reference. We label the vertex b by the program state labelling b_0 . But the question is what program states we should assign to the vertices e and f . Note that two different vertices e_i and e_j may be labelled by different program states. So, for the vertex e we need to introduce a program state $e.s[\kappa]$, parametrised by a *parameter* κ , such that each program state $e_i.s$ can be equivalently expressed by $e.s[\kappa]$, when κ is substituted by some number ν . Of course, for different states $e_i.s$ and $e_j.s$ there are different numbers, say ν_i and ν_j , for parameter substitution. We similarly need a parametrised program state $f.s[\kappa]$ for the vertex f . We compute the states $e.s[\kappa]$ and $f.s[\kappa]$ before we start symbolic execution of the program from the Figure 1 (a) by analysing



the following its part. The part consists of all the locations b, c, d, e, f discussed above and of all the edges between them. Note that the sequence b, c, d, b of locations forms a cyclic path inside the analysed part. This cycle is actually the source of the path in grey regions. Nevertheless, we want to describe program states at *exits* from the part. The exits from the part are target vertices of those edges of the part, which do not belong to the cycle. Therefore, locations e and f are the exits from the part. We also identify the location b as entry location into the part, since we can enter the part by stepping into location b . The part is completely defined now. We analyse it independently from the remainder of the program. It mainly means that if we use some symbols α_i in the analysis, then they are related to the entry location b of the part and not to the entry location of the whole program. At this point we are more concerned about formulation of a result from the analysis and its usage then the analysis itself. Therefore, we postpone its description to Section 4. We assume here that key properties $e.s[\llbracket \kappa \rrbracket]$ and $f.s[\llbracket \kappa \rrbracket]$ from the analysis are already computed, so we may formulate an output from the analysis of the part as the following *template*

$$t = (b, 2, \{(\theta_e, \varphi_e, [], e)[\llbracket \kappa \rrbracket], (\theta_f, \varphi_f, [], f)[\llbracket \kappa \rrbracket]\}),$$

where b is the entry location to the analysed part, the number 2 identifies number of following parametrised program states and the remaining two tuples are the parametrised program states $e.s[\llbracket \kappa \rrbracket]$ and $f.s[\llbracket \kappa \rrbracket]$ respectively. Note that $[]$ identifies empty call stack. The template contains all the information we need to build compact symbolic execution tree, where the path in grey is folded as described above.

Let us symbolically execute the program at Figure 1 (a) with the template t . We construct a compact symbolic execution tree during the execution. The tree is depicted at Figure 1 (c). We apply classic symbolic execution, until we reach the entry location $t.b$. Let b be the vertex in the tree, when we reach the location $t.b$ and let s be the program state $b.s$. We now instantiate the template. Since we have exactly two program states in t , we create exactly two successor vertices e and f of the vertex b in the tree. The vertices e and f references locations $t.e$ and $t.f$ respectively and they are further labelled by program states $s \circ (t.\theta_e, t.\varphi_e, [], t.e)[\llbracket \kappa \rrbracket]$ and $s \circ (t.\theta_f, t.\varphi_f, [], t.f)[\llbracket \kappa \rrbracket]$ respectively. We finish the instantiation of t by creating edges (b, e) and (b, f) labelled by symbolic expressions $s.\theta\langle t.\varphi_e[\llbracket \kappa \rrbracket] \rangle$ and $s.\theta\langle t.\varphi_f[\llbracket \kappa \rrbracket] \rangle$ respectively. The situation is also depicted at Figure 1 (c). Then we continue from both vertices e and f independently using classic symbolic execution again. These both executions reaches function exit location g in one step and compact symbolic execution terminates.

Let us now have a look at Figure 2 (a) depicting a program with a function `countIf`. The function counts number of elements in array `A` having values equal to `x`. We show the symbolic execution tree of the program at Figure 2 (b). There we can see several sequences of grey regions. According to our experience with the previous example we can easily detect that all that paths in grey are generated by a single program part consisting of locations c, d, e, f, g and edges between them. But there are two cyclic paths $\pi = c, d, e, f, c$ and $\pi' = c, d, f, c$ inside

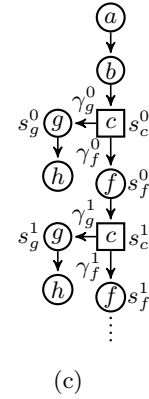

6

into the part. The analysis of the path (discussed later in Section 4) computes the following template

$$t = (c, 2, \{(\theta_f, \varphi_f, [], f) \llbracket \kappa \rrbracket, (\theta_g, \varphi_g, [], g) \llbracket \kappa \rrbracket\})$$

Compact symbolic execution with the template t computes compact symbolic execution tree depicted at Figure 2 (c). The tree is basically a single link list. Note that we instantiate the template each time we reach the location c . But for each such instantiation we need a fresh parameter to prevent parameter collisions from previous instantiations. We assume we have infinitely many different names for the parameters. Therefore, expressions and program states at Figure 2 (c) are as follows: $\gamma_g^i = s_c^i.\theta\langle t.\varphi_g \llbracket \kappa_i \rrbracket \rangle$, $\gamma_f^i = s_c^i.\theta\langle t.\varphi_f \llbracket \kappa_i \rrbracket \rangle$, $s_g^i = s_c^i.\theta \circ (t.\theta_g, t.\varphi_g, [], g) \llbracket \kappa_i \rrbracket$ and $s_f^i = s_c^i.\theta \circ (t.\theta_f, t.\varphi_f, [], f) \llbracket \kappa_i \rrbracket$.

The sequences of grey regions in the tree at Figure 2 (b) goes bottom left. But imagine they would go bottom right. Then each region would represent a sequence of program locations c, d, f, c . If we analysed closer these sequences of grey regions, we would realise that there is a part of the program from Figure 2 (a) consisting of vertices c, d, f, e, g , where c, d, f, c is the only cycle in the part, c is the entry location into the part and locations e and g are exits from the part. If we further built a template from the part and run compact symbolic execution with it, we would also receive a compact symbolic execution tree forming basically a single linked list.

To summarise, a general scheme for compact symbolic execution of the examples above is as follows. We enumerate cyclic paths in a given program one by one. For each enumerated cycle we first complete related program part (determining entry and exit locations) and then we compute a template for the part. Then we run compact symbolic execution with the computed templates.

3 Definition

In this section, we give precise definition of templates parametrised by a single parameter and we present compact symbolic execution algorithm using these templates. We start with basic terms valid for compact symbolic execution with any kinds of templates. We assume for the rest of this section that P is a program.

An injective function Θ from a set of all program variables of P to a set of *symbols* $\{\alpha_0, \alpha_1, \alpha_2, \dots\}$ is an *initial symbolic memory* of P . For each program variable $\mathbf{a}$ its symbol $\Theta(\mathbf{a})$ represents some yet unknown value of that variable. So, $\Theta(\mathbf{a})$ must belong to a domain of $\mathbf{a}$ (i.e. $\Theta(\mathbf{a})$ is of $\mathbf{a}$'s type). Further, *numeric symbolic expression* is application of operators to numeric constants and symbols. *Boolean symbolic expression* is either an equality or inequality predicate over numeric symbolic expressions, or an application of logical connectives to other boolean symbolic expressions. *Symbolic expression* is either numeric or boolean symbolic expression. We have already given the definition of symbolic memory, call stack and program state in Section 2. But we in addition define for any program state $s = (\theta, \varphi, \Xi, l)$ that $\theta(\mathbf{a}) = \Theta(\mathbf{a})$, for each local variable $\mathbf{a}$ undefined at location l . Also note that Θ is just a special symbolic memory.

The pseudo-code of Algorithm 1 represents two algorithms. If we consider only unmarked lines, we get algorithm of classic symbolic execution. If we add lines marked with $\square$ we get algorithm of compact symbolic execution with templates with a single parameter. The lines marked by $*$ are responsible for construction of symbolic execution tree. Obviously, both classic and compact symbolic executions can appear at both versions: with and without construction of the tree.

Algorithm 1: executeSymbolically

Input: P - program to be executed
 d - set of template detectors (only in $\square$ -version)
Output: E - set of final program states
 T - symbolic execution tree of P (only in $*$ -version)

```

1 Let  $p$  be a set of all templates detected in  $P$  by detectors  $d$ 
2  $s_0 := (\Theta, true, [], \text{entry location of the starting function})$ 
3 Let  $Q$  be a queue of program states initially containing only  $s_0$ 
* 4 Create a root vertex of  $T$  labelled with  $s_0$ 
5 repeat
6   Extract the first program state  $s$  from  $Q$ 
7   if  $s.l$  is the exit location of the starting function or an error location then
8     Insert  $s$  into  $E$ 
9   else
10     $S := \emptyset$ 
11     $p' := \text{getTemplatesAt}(s.l, p)$ 
12    if  $p' \neq \emptyset$  then
13       $t := \text{chooseTemplate}(p')$ 
14       $\kappa := \text{getFreshParam}()$ 
15      Replace all occurrences of the former parameter in  $t$  by  $\kappa$ 
16      foreach  $i = 1, \dots, t.n$  do
17         $s' := s \circ (t.\theta_i, t.\varphi_i, t.\Xi_i, t.l_i) \llbracket \kappa \rrbracket$ 
18        Insert  $s'$  into  $S$ 
19    else /* applying classic symbolic execution step */
20       $S := \text{computeClassicSuccessors}(P, s)$ 
* 21 Let  $u$  be a leaf of  $T$  whose label is  $s$ 
22    foreach program state  $s' \in S$  such that  $s'.$  $\varphi$  is satisfiable do
23      Insert  $s'$  at the end of  $Q$ 
* 24      Insert a new vertex  $v$  labeled with  $s'$  into  $T$ 
* 25      Insert an edge  $(u, v)$  into  $T$ 
26 until  $Q$  becomes empty
27 return  $E$ 
* 28  $T$ 

```

We now describe the algorithm of classic symbolic execution. At line 2, there we create initial program state and then we insert it into a queue Q . The queue Q keeps all program states for which we have not been computing successor

program states yet. Until Q becomes empty, we iterate the loop at lines 5–26. At line 7 we detect whether actually processed program state s is final or not. If it is not, we compute its successors at line 20. In short, the function `computeClassicSuccessors` either executes actions of out-edges from location $s.l$ or it resolves return from a call, if $s.l$ is a function exit location. We already gave an intuition how to symbolically execute actions at the beginning of Section 2. We further see at line 22 that we discard all successors of s , whose path conditions are not satisfiable. Discarded states do not represent real behaviour of the program.

Now we focus on $*$ -version of the algorithm. We create root of the tree labelled by the initial program state at line 4. When processing a state s inside the loop we take the only leaf in the tree labelled with s at line 21. We compute its successor vertices at lines 24 and 25. Note that the successors are labelled by successor states of s .

We have to postpone description of $\square$ -version of the algorithm, until we have properly defined templates the algorithm uses. The first step toward the definition is introduction of parameters and their substitution.

We distinguish a set $\{\kappa, \tau, \kappa_1, \tau_1, \kappa_2, \tau_2, \dots\}$ of variables called *parameters*, ranging over non-negative integers. We extend numeric symbolic expressions such that they may also contain application of operators to parameters. We allow boolean symbolic expression to contain quantification of parameters. We further naturally extend symbolic memories, call stacks and program states to contain symbolic expressions with parameters. When we want to emphasise that κ is a set of all parameters appearing in a symbolic expression φ , we denote it as $\varphi[\kappa]$. And similarly for symbolic memories, call stacks and program states.

We now describe substitution of parameters. Each function from a finite set of parameters to non-negative integers is *valuation*. Let $\varphi[\kappa]$, $\theta[\kappa]$, $\Xi[\kappa]$ and $s[\kappa]$ be a symbolic expression, a symbolic memory, a call stack and a program state respectively, $\kappa \neq \emptyset$ and ν be a valuation defined for all parameters in κ . Then we compute $\varphi[\nu]$ from $\varphi[\kappa]$ such that we substitute all parameters in φ by related integers in ν . We compute $\theta[\nu]$ from $\theta[\kappa]$ such that we substitute all parameters in all the expressions in θ by related integers in ν . Further, we compute $\Xi[\nu]$ from $\Xi[\kappa]$ such that we substitute all parameters in restrictions σ of all stack records of Ξ by related integers in ν . And finally, we compute $s[\nu]$ from $s[\kappa]$ such that we apply the substitution to its first three components.

We often use the following simplified notation. If an expression φ contains exactly one parameter κ and a $\{(\kappa, \nu)\}$ is a valuation, then we write $\varphi[\kappa]$ and $\varphi[\nu]$ instead of $\varphi[\{\kappa\}]$ and $\varphi[\{(\kappa, \nu)\}]$ respectively. The notation also applies to symbolic memories, call stacks and program states.

Next we define composition of program states and equivalence between them. We also express some basic equivalences for compositions.

Definition 2 (Composition) Let $\Xi = [r_0, \dots, r_m]$ and $\Xi' = [r'_0, \dots, r'_n]$ be call stacks and $s = (\theta, \varphi, \Xi, l)$ and $s' = (\theta', \varphi', \Xi', l')$ be program states. Then composite program state $s \circ s' = (\theta \circ \theta', \varphi \wedge \theta(\varphi'), \Xi \circ (\theta \circ \Xi'), l')$, where $\theta(\varphi')$ is a symbolic expression constructed from φ' such that all symbols α_i in φ' are

simultaneously substituted by symbolic expressions $\theta(\Theta^{-1}(\alpha_i))$, $\theta \circ \theta'$ is a symbolic memory such that for each variable $\mathbf{a}$ we have $(\theta \circ \theta')(\mathbf{a}) = \theta(\theta'(\mathbf{a}))$, $\theta \circ \Xi' = [\bar{r}'_0, \dots, \bar{r}'_n]$, where each $\bar{r}'_i$ is equal to r_i except the first component being $\bar{r}'_i.\sigma = \theta \circ r'_i.\sigma$, and $\Xi \circ (\theta \circ \Xi') = [r_0, \dots, r_m, \bar{r}'_0, \dots, \bar{r}'_n]$.

Definition 3 (Equivalence) Let φ, φ' be symbolic expressions, θ, θ' be symbolic memories, $\Xi = [r_0, \dots, r_m]$, $\Xi' = [r'_0, \dots, r'_n]$ be call stacks and s, s' be program states. Then $\varphi \equiv \varphi'$, if φ and φ' are either logically equivalent boolean symbolic expressions or numeric symbolic expressions such that $(\varphi = \varphi') \equiv \text{true}$. $\theta \equiv \theta'$, if for each variable $\mathbf{a}$ we have $\theta(\mathbf{a}) \equiv \theta'(\mathbf{a})$. $\Xi \equiv \Xi'$, if $m = n$ and for each $i \in \{0, \dots, m\}$ we have $r_i.\sigma$ and $r'_i.\sigma$ are defined for the same variables with equivalent values and $r_i.l = r'_i.l$. And $s \equiv s'$, if both s and s' have equal or equivalent components.

Lemma 1 (Equivalent Compositions) Let s, s' and s'' be program states, ν and ν' be valuations of all parameters in s and s' respectively such that $\nu \cup \nu'$ is also a valuation, θ, θ' and θ'' be symbolic memories, and φ and $\psi \wedge \psi'$ be symbolic expressions. Then $s \circ (s' \circ s'') \equiv (s \circ s') \circ s''$, $s[\nu] \circ s'[\nu'] \equiv (s \circ s')[\nu \cup \nu']$, $\theta \circ (\theta' \circ \theta'') \equiv (\theta \circ \theta') \circ \theta''$, $(\theta \circ \theta')(\varphi) \equiv \theta(\theta'(\varphi))$ and $\theta(\psi) \wedge \theta(\psi') \equiv \theta(\psi \wedge \psi')$.

Before we formulate a definition of templates with one parameter we give its intuition. Let us consider a part of the program P with an entry location e and n distinct exit locations $x_1, \dots, x_n$. We saw in Section 2, that key properties for building a template of the part are program states $s_1[\kappa], \dots, s_n[\kappa]$ at exit locations $x_1, \dots, x_n$. We need to ensure that states $s_i[\kappa]$ correctly represent behaviour of the analysed part. King proved [8] that path conditions at leaf vertices of symbolic execution tree T of P are satisfiable. Therefore, if $s_i.\varphi$ is not satisfiable, then there cannot be a path in T traversing the part from e to x_i . The exit x_i is thus useless for the construction of the template and we omit it. King further showed [8] that for two different leaf vertices u and v of T we have $u.\varphi \wedge v.\varphi \equiv \text{false}$. This statement is also valid for program parts. So, we require $(s_i.\varphi \wedge s_j.\varphi) \equiv \text{false}$ for all different i and j . We summarise these requirements in the following definition.

Definition 4 (Template with one parameter) Let T be symbolic execution tree of P computed by $*$ -version of Algorithm 1, $n > 0$ be an integer, $l, l_1, \dots, l_n$ be locations in P , κ be a parameter, $\theta_1[\kappa], \dots, \theta_n[\kappa]$ be symbolic memories $\varphi_1[\kappa], \dots, \varphi_n[\kappa]$ be satisfiable boolean symbolic expressions such that for each $i, j \in \{1, \dots, n\}, i \neq j$ we have $(\varphi_i \wedge \varphi_j) \equiv \text{false}$ and let $\Xi_1[\kappa], \dots, \Xi_n[\kappa]$ be call stacks. Then a tuple $t = (l, n, \{(\theta_1, \varphi_1, \Xi_1, l_1), \dots, (\theta_n, \varphi_n, \Xi_n, l_n)\})$ is a template with one parameter κ in P , if

- (L1) For each path $\pi = u\omega$ in T from any vertex u satisfying $u.l = t.l$ to a leaf, there is a vertex $w \in \omega$, an index $i \in \{1, \dots, n\}$ and an integer $\nu \geq 0$, such that $w.s \equiv u.s \circ (t.\theta_i, t.\varphi_i, t.\Xi_i, t.l_i)[\nu]$.
- (L2) For each vertex u of T , an index $i \in \{1, \dots, n\}$ and non-negative integer ν such that $u.l = t.l$ and $(u.\varphi \wedge u.\theta(t.\varphi_i[\nu]))$ is satisfiable, there is a successor w of u in T such that $w.s \equiv u.s \circ (t.\theta_i, t.\varphi_i, t.\Xi_i, t.l_i)[\nu]$.

Note that requirement (L1) guarantees that no path in T with vertices u and v such that $u.l = l$ and $v.l = l_i$ is suppressed by the state $(t.\theta_i, t.\varphi_i, t.\Xi_i, t.l_i) \llbracket \kappa \rrbracket$. And requirement (L2) guarantees that program state $(t.\theta_i, t.\varphi_i, t.\Xi_i, t.l_i) \llbracket \kappa \rrbracket$ does not produce unreal paths.

We are ready to describe $\square$ -version at Algorithm 1. At line 1 there we detect templates with one parameter in the passed program P . That is a task for so called *template detectors*. We discuss a possible construction of such a detector in Section 4. The only purpose of lines 11–19 is to compute successor states of a currently processed program state s . At line 11 there we call a system function `getTemplatesAt`, which selects those templates, whose entry locations matches the actual program location $s.l$. If the selection is not empty we may instantiate one of the selected templates. A system function `chooseTemplate` is supposed to choose exactly one template t to be instantiated. We may for example choose randomly. We do not put any constraints to the selection strategy. To prevent parameter collisions with already instantiated templates, we first get a fresh parameter at line 14 and then we replace the parameter used in t by default by the fresh one. Then we get to a loop at line 16. For each program state in the template we create one its successor program state (see line 17).

We finish this section by formulating soundness and completeness theorems for compact symbolic execution using templates with one parameter. They say, that both classic and compact symbolic execution explore the same set of real paths of P . We assume that T and T' are symbolic execution trees of the program P computed by $*$ - and $\square$ -, $*$ -versions of Algorithm 1 respectively.

Theorem 1 (Soundness) *For each leaf vertex $e \in T$ there is a leaf vertex $e' \in T'$ and a valuation ν of all parameters in $e'.s$ such that $e.s \equiv e'.s \llbracket \nu \rrbracket$.*

Theorem 2 (Completeness) *For each leaf vertex $e' \in T'$ there is a leaf vertex $e \in T$ and a valuation ν of all parameters in $e'.s$ such that $e.s = e'.s \llbracket \nu \rrbracket$.*

Because of space limitations we omit proofs of the theorems. Nevertheless, an interested reader may find the proofs in our technical report [13].

4 Computation of Templates

In this section we present an algorithm computing templates with one parameter for program parts consisting of a cyclic path with specified a single entry location and several exit ones.

Let P be a program and let us suppose we have a program part of P with a cyclic path, an entry location e and some exit location x . We show how to compute a symbolic memory $\theta_x \llbracket \kappa \rrbracket$, a path condition $\varphi_x \llbracket \kappa \rrbracket$ and a call stack $\Xi_x \llbracket \kappa \rrbracket$ at the exit location x . The computation of remaining parts of resulting template are then straightforward.

The algorithm proceeds in two steps. First, we compute a program state $(\theta, \varphi, [], e)$ resulting from classic symbolic execution of the cyclic path of the part exactly once, and a program state $(\hat{\theta}, \hat{\varphi}, \hat{\Xi}, x)$ resulting from classic symbolic

execution of a path from e to x . The second step is to express $\theta_x[\kappa]$, $\varphi_x[\kappa]$ and $\Xi_x[\kappa]$ in terms of the program states computed in the first step.

The computation of program states $(\theta, \varphi, [], e)$ and $(\hat{\theta}, \hat{\varphi}, \hat{\Xi}, x)$ requires to run classic symbolic execution on the analysed program part. But Algorithm 1 can only execute programs satisfying Definition 1. Therefore, we create a new program, say P' , representing the analysed part.

We start with a program P' consisting of all variables of P and of all those functions of P having at least one location of the cycle. Note that the cyclic path of the part may traverse several functions through call sites. We now remove all the locations and edges in P' , which do not belong to the cycle nor to the path from e to x . We assume that x does not belong to the cyclic path, since otherwise we can always create its copy outside the cycle. Next we mark the function in P' containing the entry location e as the starting function of P' and we set e to be the entry location of the function. Then we create a new location e' representing the exit location from the starting function. Now we break the cyclic path in the entry e such that we redirect the only in-edge of e (belonging to the cycle) to e' . And finally we transform x to error location by adding loop edge with **skip** action.

P' is now a program according to Definition 1. So, we can run unmarked version of Algorithm 1. Note that the algorithm must always terminate for P' . Let E be a set of resulting program states. Then $|E| \leq 2$. If there is no $s \in E$ such that $s.l = e$, then we do not create the template for the part, since there is no real path around the cycle. If there is no state $s \in E$ such that $s.l = x$, then we discard the exit x from the consideration for the template, since it is impossible to leave the loop through x . Otherwise, E contains exactly two program states, which are the states we are looking for.

Now we show how to express $\theta_x[\kappa]$, $\varphi_x[\kappa]$ and $\Xi_x[\kappa]$ in terms of the program states computed above. Let T be a symbolic execution tree of P , computed by $*$ -version of Algorithm 1. Further, let u be a vertex of T such that $u.l = e$ and $\pi = u \dots u_1 \dots u_2 \dots u_\nu \dots w$ be a path in T starting at u , iterating the cycle of the part exactly $\nu \geq 0$ times, i.e. all the vertices u_i have $u_i.l = e$, and then π leaves the cycle into the vertex w with $w.l = x$. We use memory composition to express memories of vertices along π as follows.

$$\begin{aligned} u_1.\theta &= u.\theta \circ \theta \\ u_2.\theta &= u_1.\theta \circ \theta = u.\theta \circ (\theta \circ \theta) \\ &\dots \\ u_\nu.\theta &= u_{\nu-1}.\theta \circ \theta = u.\theta \circ \underbrace{(\theta \circ \dots \circ \theta)}_\nu. \end{aligned}$$

If we denote the composition of i symbolic memories θ by θ^i , where $\theta^0 = \Theta$ and $\theta^1 = \theta$, then we have $u_i.\theta = u.\theta \circ \theta^i$ and we get

$$w.\theta = u.\theta \circ (\theta^\nu \circ \hat{\theta}).$$

We proceed similarly to express path conditions of vertices along π .

$$\begin{aligned}
u_1.\varphi &\equiv u.\varphi \wedge u.\theta\langle\varphi\rangle \equiv u.\varphi \wedge (u.\theta \circ \theta^0)\langle\varphi\rangle \equiv u.\varphi \wedge u.\theta\langle\theta^0\langle\varphi\rangle\rangle \\
u_2.\varphi &\equiv u_1.\varphi \wedge u_1.\theta\langle\varphi\rangle \equiv u.\varphi \wedge u.\theta\langle\theta^0\langle\varphi\rangle\rangle \wedge (u.\theta \circ \theta^1)\langle\varphi\rangle \equiv u.\varphi \wedge u.\theta\langle\theta^0\langle\varphi\rangle \wedge \theta^1\langle\varphi\rangle\rangle \\
&\dots \\
u_\nu.\varphi &\equiv u_{\nu-1}.\varphi \wedge u_{\nu-1}.\theta\langle\varphi\rangle \equiv u.\varphi \wedge u.\theta\langle\underbrace{\theta^0\langle\varphi\rangle \wedge \dots \wedge \theta^{\nu-1}\langle\varphi\rangle}_\nu\rangle
\end{aligned}$$

Using the following equivalence

$$\theta^0\langle\varphi\rangle \wedge \dots \wedge \theta^{\nu-1}\langle\varphi\rangle \equiv 0 \leq \nu \wedge \forall \tau \ (0 \leq \tau < \nu \rightarrow \theta^\tau\langle\varphi\rangle),$$

we can write

$$\begin{aligned}
w.\varphi &\equiv u_\nu.\varphi \wedge u_\nu.\theta\langle\hat{\varphi}\rangle \equiv u.\varphi \wedge u.\theta\langle\theta^0\langle\varphi\rangle \wedge \dots \wedge \theta^{\nu-1}\langle\varphi\rangle \wedge \theta^\nu\langle\hat{\varphi}\rangle\rangle \\
&\equiv u.\varphi \wedge u.\theta\langle 0 \leq \nu \wedge \forall \tau \ (0 \leq \tau < \nu \rightarrow \theta^\tau\langle\varphi\rangle) \wedge \theta^\nu\langle\hat{\varphi}\rangle \rangle.
\end{aligned}$$

SMT solvers do not support memory composition operation appearing in the formula $w.\varphi$. Therefore, we need an equivalent *declarative* description of the operation. Such a description is a parametrised symbolic memory $\theta\llbracket\kappa\rrbracket$, where we require $\theta\llbracket\kappa\rrbracket \equiv \theta^\kappa$, for any $\kappa \geq 0$. For a given symbolic memory θ we compute content of $\theta\llbracket\kappa\rrbracket$ per variable by applying the following two rules

$$\frac{\theta(\mathbf{a}) = \Theta(\mathbf{a}) + c, \quad \mathbf{a} \text{ is of a numeric type, } c \text{ is a numeric constant of } \mathbf{a}'\text{'s type}}{\theta\llbracket\kappa\rrbracket(\mathbf{a}) = \Theta(\mathbf{a}) + c \cdot \text{type0f}\langle\mathbf{a}\rangle(\kappa)},$$

$$\frac{\theta(\mathbf{A}) = \Theta(\mathbf{A}), \quad \mathbf{A} \text{ is of a an array type}}{\theta\llbracket\kappa\rrbracket(\mathbf{A}) = \Theta(\mathbf{A})},$$

where expression $\text{type0f}\langle\mathbf{a}\rangle(\kappa)$ represent casting operation of κ to a type of variable $\mathbf{a}$. If there is a variable, which does not match any of the rules, then we fail to compute $\theta\llbracket\kappa\rrbracket$. And we thus fail to compute the template. Obviously, one can provide more rules for more complex symbolic memories. The presented rules are only supposed to illustrate the process.

Having $\theta\llbracket\kappa\rrbracket$ we define

$$\begin{aligned}
\theta_x\llbracket\kappa\rrbracket &= \theta\llbracket\kappa\rrbracket \circ \hat{\theta} \\
\varphi_x\llbracket\kappa\rrbracket &= 0 \leq \kappa \wedge \forall \tau \ (0 \leq \tau < \kappa \rightarrow \theta\llbracket\tau\rrbracket\langle\varphi\rangle) \wedge \theta\llbracket\kappa\rrbracket\langle\hat{\varphi}\rangle \\
\Xi_x\llbracket\kappa\rrbracket &= \theta\llbracket\kappa\rrbracket \circ \hat{\Xi},
\end{aligned}$$

and we get $w.\theta \equiv u.\theta \circ \theta_x\llbracket\nu\rrbracket$, $w.\varphi \equiv u.\varphi \wedge u.\theta\langle\varphi_x\llbracket\nu\rrbracket\rangle$ and $w.\Xi \equiv u.\Xi \circ (u.\theta \circ \Xi_x\llbracket\nu\rrbracket)$. Using these equivalences we write $w.s \equiv u.s \circ (\theta_x, \varphi_x, \Xi_x, x)\llbracket\nu\rrbracket$, which is exactly the equivalence used in Definition 4 (L1) and (L2).

5 Discussion

We presented compact symbolic execution using only templates with a single parameter. We further restrict ourselves to computation of templates only for program parts consisting of cyclic paths. We can get even better reduction of size of symbolic execution tree, if we create templates for more complex program parts, and when we use more parameters. Let us consider the function `countIf` at Figure 2. The program loop in the function consists of two cyclic paths around it. We have already discussed templates for both cycles in Section 2. But if we built a single template using two parameters (one parameter per cyclic path), then resulting compact symbolic execution tree would be finite. Further, we have not considered a possible relations between different instances of some templates. A good example is recursion. We first have a sequence of recursive calls and later we return from them. If we create a template for the phase of recursive calls and the second one for the phase of the returning, then instances of these templates must appear *in pairs* along paths in symbolic execution tree. (Our technical report [13] provides a definition of templates for recursive functions). We see, there is a space for extensions of the basic concepts we presented here.

Let us consider well known algorithm `binarySearch`. Template detection for this program (even with a single parameter) may infer geometric progressions as values of some variables. They may later cause serious performance issues for SMT solver, when they get into a path condition.

Compact symbolic execution commonly has higher performance requirements to SMT solvers than classic one. Path conditions may contain template parameters besides symbols. And parameters are quantified. This is the price of the ability to reason about multiple program paths at once.

King showed effectiveness of symbolic execution for automated testing generation [8]. Producing a good test typically means to reach some interesting (e.g. bug suspicious) program location. Compact symbolic execution can be very helpful in this task. Let us consider a situation, when reachability of such a target location is dependant on an exact number of iterations of a particular cycle. Providing a template for a program part with the cycle, we can simultaneously reason about all the paths exiting from the cycle. Therefore, instead of exploration of paths space by classic symbolic execution, we can just send a query to SMT solver to check satisfiability of parametrised path condition.

King also showed in his paper [8], how symbolic execution can be used in proving program correctness according to Floyd's method [3]. Using templates we can decrease or in some cases even eliminate the need of loop invariants. For programs, where compact symbolic execution is finite in contrast to classic one, there we do not need loop invariants at all. And for other programs, loop templates describe behaviour of some paths through loop, and we may therefore provide simpler invariants for the remaining behaviour of the loop.

6 Related Work

Compact symbolic execution is tightly related to the work of King in 1976 [8], where the author introduced the general concept of classic symbolic execution. Besides the description of symbolic execution King discussed its applicability to program testing and formal proving of correctness according to Floyd’s method [3]. Nevertheless, issues like the path explosion problem were not tackled.

In [6] authors propose a program instrumentation by a code providing lazy initialisation of dynamically allocated data structures like lists or trees and they enable symbolic execution of the instrumented program by a standard model checker without building a dedicated tool. The lazy initialisation algorithm is further improved and formally defined as an operational semantics of a core subset of the Java Virtual Machine in [2].

A scalability of symbolic execution to real world programs can be improved by exploring only client’s code [7]. A library code (like string manipulation, standard containers like sets or maps) can be assumed as well defined and properly tested.

There are several symbolic execution based techniques constructing loop summaries or simply counting loop iterations [5,11,12]. The introduction of counters usually provides a possibility to speak about multiple paths through loop at once. A technique presented in [5] analyses loops on-the-fly, i.e. during simultaneous concrete and symbolic execution of a program for a concrete input. The loop analysis infers inductive variables, i.e. variables that are modified by a constant value in each loop iteration. These variables are used to build loop summaries expressed in a form of pre and postconditions. The LESE technique presented in [11] introduces symbolic variables for the number of times each loop was executed. LESE links the symbolic variables with features of a known grammar generating inputs. Using these links, the grammar can control the numbers of loop iterations performed on a generated input. A symbolic-execution-based algorithm in [12] produces a nontrivial necessary condition on input values to drive the program execution to the given location. The key part of the technique is computation of loop summaries in form of symbolic program states and path conditions both parametrised by so called path counters. Each path counter is assigned to individual path through the analysed loop.

There are also approaches computing function summaries [4,1]. Reusing summaries at call sites typically leads to an interesting performance improvement. Moreover, summaries may insert additional symbolic values into a path condition which often leads to another performance improvement.

Finally, there are also techniques partitioning program paths into separate classes according to impact of the paths to a given set of program variables [9,10]. Values of output variables are typically considered as a partitioning criteria.

7 Conclusion

We introduced a generalisation of classic symbolic execution called compact symbolic execution. We generalised notion of symbols of classic symbolic execution

such that symbols can be related to different program locations now. This allows us to analyse individual parts of a given program separately from the rest of the program. We further introduced concept of templates representing declarative parametric descriptions of behaviour of separately analysed program parts. We gave precise definition of templates with one parameter and we provided algorithm of compact symbolic execution using these templates.

Acknowledgements We would like to warmly thank Jan Strejček for his comments to several late drafts of this paper.

References

1. S. Anand, P. Godefroid, and N. Tillmann. Demand-driven compositional symbolic execution. In *TACAS'08*, pages 367–381. Springer, 2008.
2. X. Deng, J. Lee, and Robby. Efficient and formal generalized symbolic execution. *Automated Software Engineering*, pages 1–69, 2011.
3. R. W. Floyd. Assigning meanings to programs. In *Proceedings of a Symposium on Applied Mathematics*, pages 19–31, 1967.
4. P. Godefroid. Compositional dynamic test generation. In *POPL '07*, pages 47–54. ACM, 2007.
5. P. Godefroid and D. Luchaup. Automatic partial loop summarization in dynamic test generation. In *ISSTA '11*, pages 23–33. ACM, 2011.
6. S. Khurshid, C. S. Păsăreanu, and W. Visser. Generalized symbolic execution for model checking and testing. In *TACAS'03*, pages 553–568. Springer-Verlag, 2003.
7. S. Khurshid and Y. L. Suen. Generalizing symbolic execution to library classes. In *PASTE '05*, pages 103–110. ACM, 2005.
8. J. C. King. Symbolic execution and program testing. *Commun. ACM*, pages 385–394, 1976.
9. D. Qi, H. D. T. Nguyen, and A. Roychoudhury. Path exploration based on symbolic output. In *ESEC/FSE '11*, pages 278–288. ACM, 2011.
10. R. A. Santelices and M. J. Harrold. Exploiting program dependencies for scalable multiple-path symbolic execution. In *ISSTA 2010*, pages 195–206. ACM, 2010.
11. P. Saxena, P. Poosankam, S. McCamant, and D. Song. Loop-extended symbolic execution on binary programs. In *ISSTA '09*, pages 225–236. ACM, 2009.
12. J. Strejček and M. Trtík. Abstracting path conditions. Technical report, arXiv.org, 1–23, 2011. <http://www.fi.muni.cz/~xtrtik2/apc.pdf>.
13. M. Trtík. Compact symbolic execution. Technical report, arXiv.org, 1–23, 2012. http://www.fi.muni.cz/~xtrtik2/trtik_CSE_report.pdf.